


The **PROJECTOR LIFT VPH40HC** is studied in order to support large and heavy Professional and Home Cinema video projectors up to 30 Kg of weight. The lift has been developed to be installed inside **very narrow false ceilings of only 14 cm** granting the best architectural solution in hiding projector, lift and cables.

The VPH40HC is supplied with a powerful and extremely silent motor that allows a descent from a minimum of 14 cm to a maximum extent of 54 cm. Moreover it is supplied with extendable side brackets in order to allow an easy fixing of the panel of your false ceiling by adjustable threaded bars.


The lift VPH40HC is equipped with **safety screws** which prevent the lift to extent further to the preset end stop.

*\* Ceiling cover plate is **NOT** included*


**Frontal view closed**

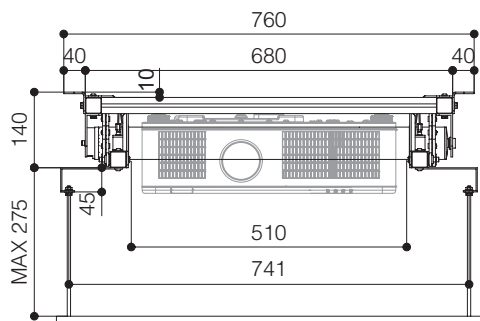



**Side view closed**

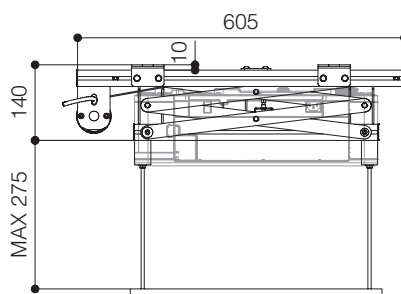

**Side view open**

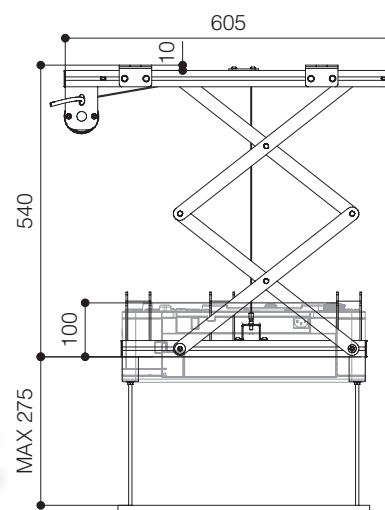

**Maximum size projector anchoring points**

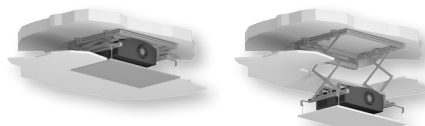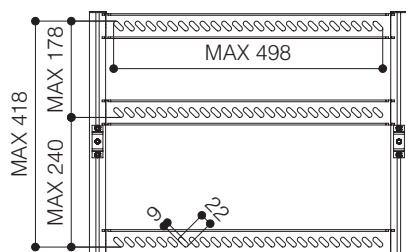

\*With lift in closed position minimum height required in false ceiling:

**Projector height + 4 cm. + thickness of ceiling cover plate**

(In any case, minimum height required in the false ceiling: 14 cm.)

### Optionals:

- Ceiling tile holder CT-660
- Kit RF remote control with external receiver
- Interface switch 12 volt
- Low voltage contact interface

### TECHNICAL SPECIFICATIONS

POWER SUPPLY	220-230V - 50HZ
MAXIMUM CONSUMPTION	184 W
TORQUE	20 Nm
MOTOR SPEED	17 rpm
MINIMUM DIMENSIONS LIFT CLOSED	680x140x605 (WxHxD in mm)
DIMENSIONS LIFT OPENED	680x540x605 (WxHxD in mm)
MAXIMUM SIZE FIXING POINTS PROJECTOR	498x418 (WxD in mm)
MAXIMUM SIZE OF PROJECTOR	510x510 (WxD in mm)
MAXIMUM LOAD	30 Kg
NET WEIGHT OF THE PROJECTOR LIFT	12 Kg
CABLE MANAGEMENT SYSTEM INCLUDED	

**Warranty:** 5 years on the motor - 24 months on the other components